

Ceiling Cutout: 6 9/16" (129 mm) Dia.

Ordering Information

Reflector Trim	Installation Ring	Gear Harness	Lamp Data
8046CCDPEXP Comfort Clear Diffuse, Polished Flange	C6XRM Matte White	BKFEU26 BKFEU26-32	26 or 32W Triple Tube GX24q-3 Base

Features

- Optics:** Directional prismatic glass spread lens and Alzak® “kick” reflector direct light smoothly across and down wall. Rotates for correct orientation. Aperture cone with iridescence-free finish.
- Socket Cup:** Effectively dissipates heat and positions lamp holder. Snaps onto reflector neck to assure consistently correct optical alignment without tools. Included with Gear Harness (see Item 6 below).
- Torsionite Springs:** Wire formed steel holds reflector/spread lens assembly snug to housing.
- Installation Ring:** Cast aluminum ring is painted matte white and has two 17ga. stainless steel springs that engage in upright position during installation. One touch snap action secures ring in ceiling cutout. ORDER SEPARATELY. See separate specification sheet for details.
- Retention Springs:** Rust resistant springs secure trim for quick, tool-less installation (quantity of 4).
- Gear Harness (not shown):** Electronic 240V, 50/60V Hz fluorescent ballast with lamp socket and wiring harness. ORDER SEPARATELY. See separate specification sheet for details.

Certifications and Ratings




Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0608


Lighting Data

Footcandles On Wall: Multiple 26w Units

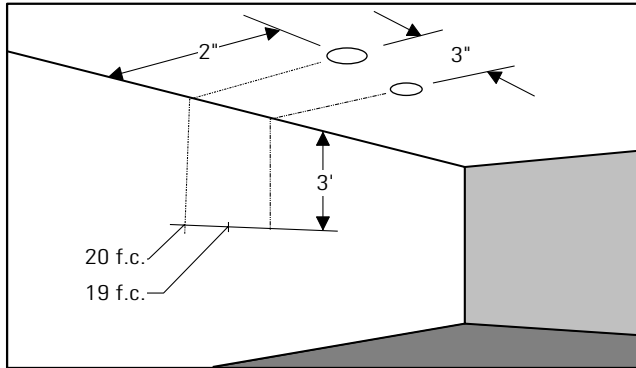

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 19 f.c. beneath units and 20 f.c. between units.

Footcandles On Wall: Multiple 32w Units

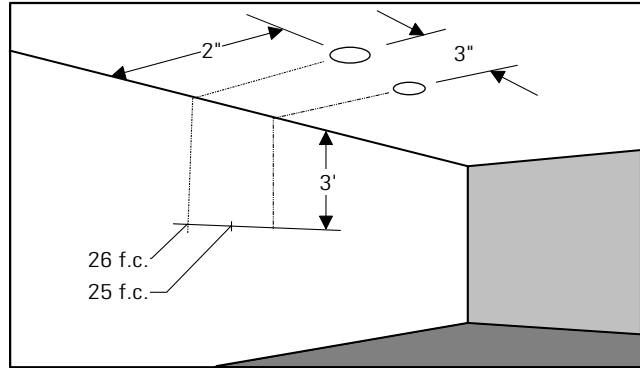

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 26 f.c. beneath units and 25 f.c. between units.

2' From Wall-2' On Center

← 2' →				
Distance From Ceiling in Feet	1	24	22	24
	2	31	31	31
	3	28	28	28
	4	22	22	22
	5	17	17	17
	6	13	13	13
	7	10	11	10
	8	9	9	9
	9	7	7	7

2' From Wall-3' On Center

← 3' →				
Distance From Ceiling in Feet	1	19	12	19
	2	23	19	23
	3	20	19	20
	4	15	15	15
	5	12	12	12
	6	9	9	9
	7	8	8	8
	8	6	6	6
	9	6	6	6

2' From Wall-2' On Center

← 2' →				
Distance From Ceiling in Feet	1	33	30	33
	2	48	46	48
	3	38	38	38
	4	28	28	28
	5	20	20	20
	6	15	15	15
	7	12	12	12
	8	10	10	10
	9	8	8	8

2' From Wall-3' On Center

← 3' →				
Distance From Ceiling in Feet	1	27	16	27
	2	36	27	36
	3	26	25	26
	4	19	19	19
	5	14	14	14
	6	11	11	11
	7	9	9	9
	8	7	7	7
	9	6	6	6

3' From Wall-3' On Center

← 3' →				
Distance From Ceiling in Feet	1	7	6	7
	2	13	12	13
	3	14	14	14
	4	14	14	14
	5	12	12	12
	6	10	11	10
	7	9	9	9
	8	8	8	8
	9	7	7	7

3' From Wall-4' On Center

← 4' →				
Distance From Ceiling in Feet	1	6	4	6
	2	11	9	11
	3	11	10	11
	4	11	10	11
	5	9	9	9
	6	8	8	8
	7	7	7	7
	8	6	6	6
	9	6	6	6

3' From Wall-3' On Center

← 3' →				
Distance From Ceiling in Feet	1	9	8	9
	2	19	18	19
	3	22	21	22
	4	19	19	19
	5	16	16	16
	6	13	13	13
	7	11	11	11
	8	9	9	9
	9	8	8	8

3' From Wall-4' On Center

← 4' →				
Distance From Ceiling in Feet	1	8	5	8
	2	16	12	16
	3	17	15	17
	4	15	14	15
	5	12	12	12
	6	10	10	10
	7	8	8	8
	8	7	7	7
	9	6	6	6

Footcandle values are averaged and rounded off and based on minimum of five units.

Job Information	Type:
-----------------	-------

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0608