

TRIM NOT SHOWN FOR CLARITY

Ceiling Cutout: 8 1/2" (217 mm) Dia.

Ordering Information

| Reflector Trim | Installation Ring | Gear Harness | Lamp Data |
|---|-------------------------|-------------------------------------|--|
| 8047CCDPEXP Comfort Clear Diffuse, Polished Flange | C7XR Matte White | BKFEU26 BKFEU26-42 | 26, 32W or 42W Triple Tube GX24q-3 Base |

Features

- Optics:** Directional prismatic glass spread lens and Alzak® "kick" reflector direct light smoothly across and down wall. Rotates for correct orientation. Aperture cone has iridescence-free finish.
- Socket Cup:** Die-cast aluminum cup effectively dissipates heat and positions lamp holder. Snaps onto reflector neck to assure consistently correct optical alignment without tools. Included with Gear Harness assembly (see item 6 below).
- Torsionite Springs:** Wire formed steel holds reflector/spread lens assembly snug to housing.
- Installation Ring:** Cast aluminum ring is painted and has two 17ga. stainless steel springs that engage in upright position during installation. One touch snap action secures ring in ceiling cutout. ORDER SEPARATELY. See separate specification sheet for details.
- Trim Retention Springs:** Rust resistant springs secure reflector/housing for quick, toolless installation (quantity of 4).
- Gear harness (not shown):** Fluorescent ballast with lamp socket and wiring harness. ORDER SEPARATELY. See separate specification sheet for details.

Certifications and Ratings



Job Information

Type:

Job Name:


Cat. No.:

Lamp(s):

Notes:


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0608

Footcandles On Wall: Multiple 32W Units

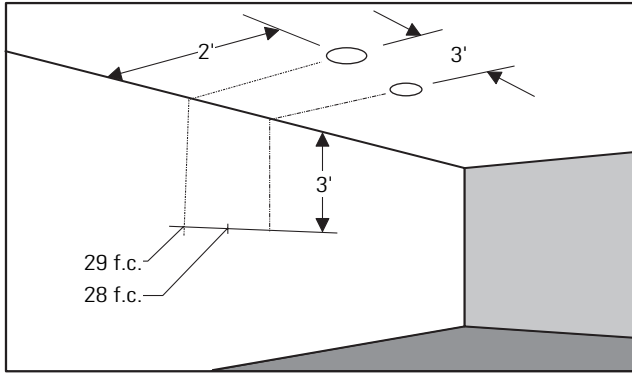

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 39 f.c. beneath units and 40 f.c. between units.

Footcandles On Wall: Multiple 42W Units

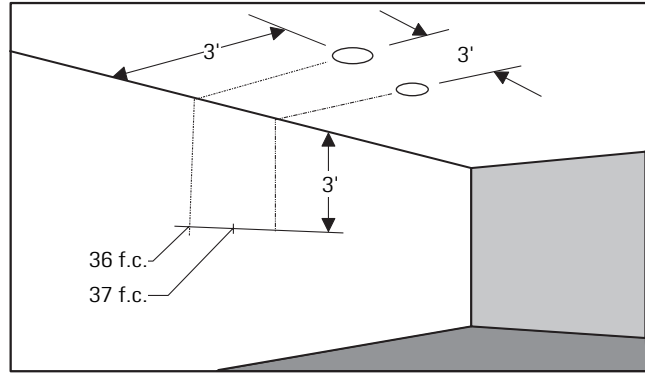

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 36 f.c. beneath units and 37 f.c. between units.

2' from Wall-2' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 38 | 32 | 38 |
| | 2 | 50 | 49 | 50 |
| | 3 | 43 | 43 | 43 |
| | 4 | 33 | 32 | 33 |
| | 5 | 25 | 32 | 25 |
| | 6 | 20 | 20 | 20 |
| | 7 | 16 | 15 | 16 |
| | 8 | 13 | 13 | 13 |
| | 9 | 11 | 11 | 11 |

2' from Wall-3' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 31 | 16 | 31 |
| | 2 | 38 | 28 | 38 |
| | 3 | 29 | 29 | 29 |
| | 4 | 22 | 22 | 22 |
| | 5 | 17 | 17 | 17 |
| | 6 | 13 | 13 | 13 |
| | 7 | 11 | 11 | 11 |
| | 8 | 9 | 9 | 9 |
| | 9 | 7 | 7 | 7 |

2' from Wall-2' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 61 | 52 | 61 |
| | 2 | 80 | 81 | 80 |
| | 3 | 61 | 62 | 61 |
| | 4 | 44 | 45 | 44 |
| | 5 | 32 | 33 | 32 |
| | 6 | 24 | 25 | 24 |
| | 7 | 19 | 19 | 19 |
| | 8 | 15 | 15 | 15 |
| | 9 | 13 | 13 | 13 |

2' from Wall-3' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 52 | 25 | 52 |
| | 2 | 57 | 51 | 57 |
| | 3 | 40 | 42 | 40 |
| | 4 | 30 | 31 | 30 |
| | 5 | 23 | 23 | 23 |
| | 6 | 18 | 18 | 18 |
| | 7 | 14 | 14 | 14 |
| | 8 | 12 | 12 | 12 |
| | 9 | 10 | 10 | 10 |

3' from Wall-3' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 10 | 9 | 10 |
| | 2 | 21 | 20 | 21 |
| | 3 | 23 | 23 | 23 |
| | 4 | 22 | 22 | 22 |
| | 5 | 19 | 19 | 19 |
| | 6 | 16 | 16 | 16 |
| | 7 | 13 | 13 | 13 |
| | 8 | 11 | 11 | 11 |
| | 9 | 10 | 10 | 10 |

3' from Wall-4' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 8 | 6 | 8 |
| | 2 | 17 | 13 | 17 |
| | 3 | 18 | 16 | 18 |
| | 4 | 16 | 16 | 16 |
| | 5 | 14 | 14 | 14 |
| | 6 | 12 | 11 | 12 |
| | 7 | 10 | 9 | 10 |
| | 8 | 8 | 8 | 8 |
| | 9 | 7 | 7 | 7 |

3' from Wall-3' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 16 | 12 | 16 |
| | 2 | 34 | 32 | 34 |
| | 3 | 36 | 37 | 36 |
| | 4 | 31 | 31 | 31 |
| | 5 | 25 | 26 | 25 |
| | 6 | 21 | 21 | 21 |
| | 7 | 17 | 17 | 17 |
| | 8 | 15 | 15 | 15 |
| | 9 | 13 | 13 | 13 |

3' from Wall-4' On Center

| | | | | |
|-------------------------------|---|----|----|----|
| | | | | |
| Distance From Ceiling in Feet | 1 | 14 | 8 | 14 |
| | 2 | 29 | 21 | 29 |
| | 3 | 28 | 27 | 28 |
| | 4 | 23 | 24 | 23 |
| | 5 | 19 | 20 | 19 |
| | 6 | 16 | 16 | 16 |
| | 7 | 13 | 14 | 13 |
| | 8 | 12 | 12 | 12 |
| | 9 | 10 | 10 | 10 |

Footcandle values are averaged and rounded off and based on minimum of five units.

Job Information Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • A0608