

Ordering Information

Catalog No.	Finishes	Lamps	Use with Fixture (Order Separately)
8727M16 WH	Matte White	50W Max, 12 Volt, MR16 2-pin-GX 5.3 base	8702 Lytespan Adapter
8727M16 TM	Dark Titanium		28702 ProSpec Adapter
8727M16 NM	Natural Metal		

Features

- Shade:** Die-cast aluminum.
- Neck Flange:** Cold rolled steel, zinc-plated. Used to attach shade to fixture, without tools.
- Groove:** To connect Accessory Holder to shade.
- Accessory Holder:** Stamped, 20 ga. steel. Clean surface, no visible hardware on exterior. Accessory Holder accepts two filters max.
- Accessory Springs:** Steel springs, riveted to Accessory Holder, holds filter and secures holder into shade. (No tools required).
- Glass Lens:** Clear glass lamp shield. MR-16 lamp requires glass shield or at least one solid glass accessory at all times.

Options and Accessories

CAUTION: Do not use this fixture without the Accessory Holder. Accessory Holder must be used with provided glass lens or at least one solid glass accessory at all times.

Color Filters: AF25 (RD, BL, GR, MM, BG, YG, MA, SP, LS, SB, BA, DA, LP), Diffusion/Special Filters: AF25 (UV, PF, SY, LF, AS), & Hex Cell Louver: AL25HC.

Finish

Shade: White or Titanium baked enamel, or Brushed Metal with a protective Clear Coat.

Accessory Holder: Matte Black.

Labels

UL, I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	




AIMING ANGLE:

- L** Beam length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

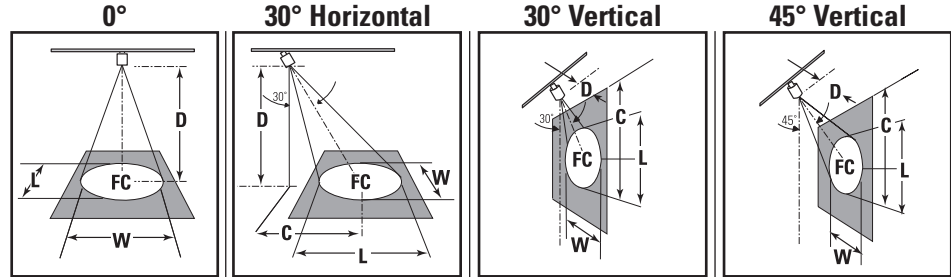

LAMP

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W																									
20W MR16 VNSP (EXZ)	7°	7400	3000	6' 206	0.7' 0.7'	8' 116	1.0' 1.0'	10' 74	1.2' 1.2'	12' 51	1.5' 1.5'	8' 4.6'	75	1.3' 1.1'	12' 6.9'	33	2.0' 1.7'	14' 8.1'	25	2.3' 2.0'	16' 9.2'	19	2.6' 2.3'	2' 3.5'	231	1.0' 0.5'	3' 5.2'	103	1.5' 0.7'	4' 6.9'	58	2.0' 1.0'	5' 8.7'	37	2.5' 1.2'	4' 4.0'	164	1.0' 0.7'	5' 5.0'	105	1.2' 0.9'	6' 6.0'	73	1.5' 1.0'	7' 7.0'	53	1.7' 1.2'
20W MR16 NSP (ESX)	15°	3750	5000	6' 104	1.6' 1.6'	8' 59	2.1' 2.1'	10' 38	2.6' 2.6'	12' 26	3.2' 3.2'	6' 3.5'	68	2.1' 1.8'	8' 4.6'	38	2.8' 2.4'	10' 5.8'	24	3.5' 3.0'	12' 6.9'	17	4.2' 3.6'	2' 3.5'	117	2.2' 1.1'	3' 5.2'	52	3.3' 1.6'	4' 6.9'	29	4.4' 2.1'	5' 8.7'	19	5.6' 2.6'	4' 4.0'	83	2.1' 1.5'	5' 5.0'	53	2.7' 1.9'	6' 6.0'	37	3.2' 2.2'	7' 7.0'	27	3.8' 2.6'
20W MR16 FL (BAB)	40°	525	5000	2' 131	1.5' 1.5'	3' 58	2.2' 2.2'	4' 33	2.9' 2.9'	5' 21	3.6' 3.6'	2' 1.2'	85	2.0' 1.7'	3' 1.7'	38	3.0' 2.5'	4' 2.3'	21	4.1' 3.4'	5' 2.9'	14	5.1' 4.2'	2' 3.5'	16	9.7' 2.9'	3' 5.2'	7	14.5' 4.4'	4' 6.9'	4	19.3' 5.8'	2' 2.0'	46	3.4' 2.1'	3' 3.0'	21	5.0' 3.1'	4' 4.0'	12	6.7' 4.1'	5' 5.0'	7	8.4' 5.1'			
35W MR16 SP (FRA)	20°	3900	4000	6' 108	2.1' 2.1'	8' 61	2.8' 2.8'	10' 39	3.5' 3.5'	12' 27	4.2' 4.2'	5' 2.9	101	2.4' 2.0'	7' 4.0'	52	3.3' 2.9'	9' 5.2'	31	4.3' 3.7'	11' 6.4'	21	5.2' 4.5'	2' 3.5'	122	3.1' 1.4'	3' 5.2'	54	4.7' 2.1'	4' 6.9'	30	6.2' 2.8'	5' 8.7'	20	7.8' 3.5'	3' 3.0'	153	2.2' 1.5'	5' 5.0'	55	3.6' 2.5'	7' 7.0'	28	5.1' 3.5'	9' 9.0'	17	6.6' 4.5'
35W MR16 FL (FMW)	40°	1000	5000	5' 40	3.6' 3.6'	6' 28	4.4' 4.4'	7' 20	5.1' 5.1'	8' 16	5.8' 5.8'	5' 2.9	26	5.1' 4.2'	6' 3.5'	18	6.1' 5.0'	7' 4.0'	13	7.1' 5.9'	8' 4.6'	10	8.1' 6.7'	2' 3.5'	31	9.7' 2.9'	3' 5.2'	14	14.5' 4.4'	4' 6.9'	8	19.3' 5.8'	5' 8.7'	5	24.2' 7.3'	4' 4.0'	22	6.7' 4.1'	5' 5.0'	14	8.4' 5.1'	6' 6.0'	10	10.1' 6.2'	7' 7.0'	7	11.7' 7.2'
37W MR16 (IR) NFL	25°	4400	4000	6' 122	2.7' 2.7'	8' 69	3.5' 3.5'	10' 44	4.4' 4.4'	12' 31	5.3' 5.3'	6' 3.5'	79	3.6' 3.1'	8' 4.6'	45	4.8' 4.1'	10' 5.8'	29	6.0' 5.1'	12' 6.9'	20	7.2' 6.1'	2' 3.5'	138	4.2' 1.8'	3' 5.2'	61	6.2' 2.7'	4' 6.9'	34	8.3' 3.5'	5' 8.7'	22	10.4' 4.4'	4' 4.0'	97	3.7' 2.5'	5' 5.0'	62	4.7' 3.1'	6' 6.0'	43	5.6' 3.8'	7' 7.0'	32	6.5' 4.4'
37W MR16 (IR) FL	40°	2200	4000	5' 88	3.6' 3.6'	6' 61	4.4' 4.4'	8' 34	5.8' 5.8'	10' 22	7.3' 7.3'	5' 2.9	57	5.1' 4.2'	6' 3.5'	40	6.1' 5.0'	8' 4.6'	22	8.1' 6.7'	10' 5.8'	14	10.2' 8.4'	2' 3.5'	69	9.7' 2.9'	3' 5.2'	31	14.5' 4.4'	4' 6.9'	17	19.3' 5.8'	5' 8.7'	11	24.2' 7.3'	4' 4.0'	49	6.7' 4.1'	5' 5.0'	31	8.4' 5.1'	6' 6.0'	22	10.1' 6.2'	7' 7.0'	16	11.7' 7.2'
42W MR16 VNSP (EZY)	9°	12300	3500	10' 123	1.6' 1.6'	12' 85	1.9' 1.9'	14' 63	2.2' 2.2'	16' 48	2.5' 2.5'	10' 5.8'	80	2.1' 1.8'	12' 6.9'	55	2.5' 2.2'	14' 8.1'	41	2.9' 2.5'	16' 9.2'	31	3.4' 2.9'	2' 3.5'	384	1.3' 0.6'	3' 5.2'	171	1.9' 0.9'	4' 6.9'	96	2.6' 1.3'	5' 8.7'	62	3.2' 1.6'	4' 4.0'	272	1.3' 0.9'	5' 5.0'	174	1.6' 1.1'	6' 6.0'	121	1.9' 1.3'	7' 7.0'	89	2.2' 1.6'
50W MR16 NSP (EXT)	10°	8800	3000	8' 138	1.4' 1.4'	10' 88	1.7' 1.7'	12' 61	2.1' 2.1'	14' 45	2.4' 2.4'	8' 4.6'	89	1.9' 1.6'	10' 5.8'	57	2.3' 2.0'	12' 6.9'	40	2.8' 2.4'	14' 8.1'	29	3.3' 2.8'	2' 3.5'	275	1.4' 0.7'	3' 5.2'	122	2.1' 1.0'	4' 6.9'	69	2.9' 1.4'	5' 8.7'	44	3.6' 1.7'	4' 4.0'	194	1.4' 1.0'	5' 5.0'	124	1.8' 1.2'	6' 6.0'	86	2.1' 1.5'	7' 7.0'	63	2.5' 1.7'
50W MR16 NFL (EXZ)	24°	2500	3000	6' 69	2.6' 2.6'	8' 39	3.4' 3.4'	10' 25	4.3' 4.3'	12' 17	5.1' 5.1'	6' 3.5'	45	3.5' 2.9'	8' 4.6'	25	4.6' 3.9'	10' 5.8'	16	5.8' 4.9'	12' 6.9'	11	6.9' 5.9'	2' 3.5'	78	3.9' 1.7'	3' 5.2'	35	5.9' 2.6'	4' 6.9'	20	7.9' 3.4'	5' 8.7'	13	9.8' 4.3'	4' 4.0'	55	3.6' 2.4'	5' 5.0'	35	4.5' 3.0'	6' 6.0'	25	5.3' 3.6'	7' 7.0'	18	6.2' 4.2'
50W MR16 FL (EXN)	36°	1600	3000	6' 44	3.9' 3.9'	8' 25	5.2' 5.2'	10' 16	6.5' 6.5'	12' 11	7.8' 7.8'	6' 3.5'	29	5.4' 4.5'	8' 4.6'	16	7.2' 6.0'	10' 5.8'	10	9.0' 7.5'	12' 6.9'	7	10.8' 9.0'	2' 3.5'	50	7.6' 2.6'	3' 5.2'	22	11.4' 3.9'	4' 6.9'	13	15.2' 5.2'	5' 8.7'	8	19.0' 6.5'	4' 4.0'	35	5.8' 3.7'	5' 5.0'	23	7.3' 4.6'	6' 6.0'	16	8.7' 5.5'	7' 7.0'	12	10.2' 6.4'
50W MR16 WFL (FNV)	60°	1200	4000	3' 128	3.1' 3.1'	5' 46	5.2' 5.2'	7' 23	7.3' 7.3'	9' 14	9.4' 9.4'	3' 1.7'	83	4.6' 3.6'	5' 2.9'	30	7.6' 6.0'	7' 4.0'	15	10.7' 8.4'	9' 5.2'	9	13.7' 10.8'	1' 1.7'	144	22.3' 2.1'	2' 3.5'	36	44.5' 4.2'	3' 5.2'	16	66.8' 6.2'	4' 6.9'	9	89.1' 8.3'	2' 2.0'	102	5.7' 2.9'	3' 3.0'	45	8.6' 4.4'	4' 4.0'	25	11.4' 5.9'	5' 5.0'	16	14.3' 7.4'

MR16 LOW VOLTAGE HALOGEN BI-PIN LAMPS WITH ALUMINIZED (NON-DICHROIC) REFLECTORS

50W MR16 NSP	10°	10500	4000	8' 164	1.5' 1.5'	12' 73	2.3' 2.3'	16' 41	3.1' 3.1'	20' 26	3.9' 3.9'	7' 4.0'	139	1.8' 1.6'	10' 5.8'	68	2.6' 2.2'	13' 7.5'	40	3.3' 2.9'	16' 9.2'	27	4.1' 3.6'	3' 5.2'	146	2.4' 1.2'	4' 6.9'	82	3.2' 1.5'	5' 8.7'	53	4.0' 1.9'	6' 10.4'	36	4.8' 2.3'	5' 5.0'	148	1.9' 1.4'	7' 7.0'	76	2.7' 1.9'	9' 9.0'	46	3.5' 2.5'	11' 11.0'	31	4.3' 3.0'
50W MR16 NFL	25°	3000	4000	6' 83	2.7' 2.7'	8' 47	3.5' 3.5'	10' 30	4.4' 4.4'	12' 21	5.3' 5.3'	5' 2.9	78	3.0' 2.6'	7' 4.0'	40	4.2' 3.6'	9' 5.2'	24	5.4' 4.6'	11' 6.4'	16	6.6' 5.6'	2' 3.5'	94	4.2' 1.8'	3' 5.2'	42	6.2' 2.7'	4' 6.9'	23	8.3' 3.5'	5' 8.7'	15	10.4' 4.4'	3' 3.0'	118	2.8' 1.9'	5' 5.0'	42	4.7' 3.1'	7' 7.0'	22	6.5' 4.4'	9' 9.0'	13	8.4' 5.6'
50W MR16 FL	35°	1900	4000	4' 119	2.9' 2.9'	6' 53	4.4' 4.4'	8' 30	5.8' 5.8'	10' 19	7.3' 7.3'	3' 1.7'	137	3.0' 2.5'	5' 2.9'	49	5.1' 4.2'	7' 4.0'	25	7.1' 5.9'	9' 5.2'	15	9.1' 7.6'	1' 1.7'	238	4.8' 1.5'	2' 2.9'	59	9.7' 2.9'	3' 4.0'	26	14.5' 4.4'	4' 5.2'	15	19.3' 5.8'	2' 2.0'	75	5.0' 3.1'	4' 4.0'	42	6.7' 4.1'	5' 5.0'	27	8.4' 5.1'	6' 6.0'	19	10.1' 6.2'

Job Information

Type:

Lightolier a Genlyte company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2005 Genlyte Group LLC • B0205

LIGHTOLIER®