

Ceiling Cutout: 5 1/16" (129 mm) Dia.

Reflector Trim		Frame-In Kit		
C4MRA CLW	Specular Clear, White Flange	Non-IC 120V/277V	Non-IC AirSeal® 120V/277V	IC AirSeal® 120V
C4MRA CLP	Specular Clear, Polished Flange	C4LVMU Magnetic 120/277V	C4LVMU Magnetic 120/277V	C4AICLVM1 Magnetic 120V
C4MRA	Add suffix. See options for other finishes.	C4LVE1 Electronic 120V	C4ALVE1 Electronic 120V	C4AICLVE1 Electronic 120V
		C4LVE2 Electronic 277V	42-75W Lensed, Horizontal MR16(12V) Lamping	20-50W MR16(12V)
		Remodel Frame-In Kit		
		Non-IC 120V		
		C4LVE1RM 50W Max. MR16 (12V)	See separate specification sheet for more information	

Note: Magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Features

- Aperture Cone:** 16 ga. aluminum. Slot cut cone opening minimizes view into fixture. Keyed to lampholder assembly for true aiming of lamp through aperture center and to prevent incorrect installation of cone. Hinged, snaps onto adjustable lampholder for easy tool-less installation. Interchangeable with other Evolution 4 1/2" low voltage trims.
- Adjustable Lampholder:** Die-cast aluminum. Built-in aperture shield blocks view into fixture. 45° vertical tilt (35° max. with remodel frame-in kit), 358° horizontal rotation; lockable. Hot aiming is possible using a phillips screwdriver. Matte black finish. Lamp shield keeps interior of fixture dark.
- Lamp Support:** Die-formed aluminum with knurled surface for easy gripping during relamping. Spring tension clips hold lamp and lens and allow fast snap-in, snap-out relamping. Matte black finish. Accepts up to two 2" dia. accessories.
- Cover Glass:** High temperature, tempered soft focus lens.
- Vertical /Horizontal Locking:** Single screw adjustment; independent locking system.
- Socket Harness:** Porcelain bi-pin socket. Pre-wired with No. 18 Teflon® leads.
- Power Harness:** Provides power to transformers.
- Frame-In Kit:** Compatible frame-in kits are listed above. See separate frame-in kit specification sheets for details.
Non-IC and Non-IC AirSeal® - Insulation must be kept 3" away from fixture sides and wiring compartments and must not be placed above fixture in a manner which will entrap heat.
IC-AirSeal® - Fixture may be in direct contact with insulation.
- Maximum Ceiling Thickness:** .875", 1.75" with C4TCA2 accessory (see C4TCA2 specification sheet for details.)

Options & Accessories

Clear: CL Gold: GD White: WH
Black: BK Comfort Clear Diffuse: CCD Champagne Bronze: CCZ
Specify desired flange: **W** White; **P** Polished

Evolution 4" Trims with Non-IC Frames

C4MRA 1 Secondary Color Lens or 1 Mixing Color Lens and 1 Specialty Filter

Evolution 4" Trims with AIC Frames

C4MRA 1 Secondary Color Lens or 1 Mixing Color Lens or 1 Specialty Filter

Labels

UL Listed (Suitable for damp locations), I.B.E.W

Teflon® is a registered trademark of E.I. DuPont.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2011 Philips Group • G1011

Accent Lighting Performance Data

(FC) is initial footcandles at center of beam. Beam length (L) and beam width (W) are to where the candlepower is reduced to 50% of the center beam candlepower.

(CBCP) is center beam candlepower. (C) is distance to the center of the beam.

Lamp data shown is typical, and is based on bare lamp photometrics. Contact lamp manufacturers for availability and performance.

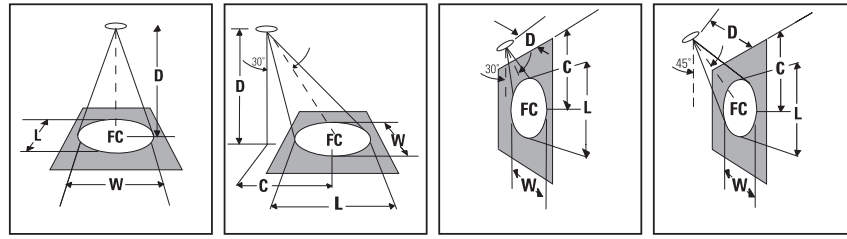

Lamps	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° Aiming Angle					30° Aiming Angle			30° Aiming Angle			45° Aiming Angle				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C

20W MR16 VNSP (EZ)	7°	8200	3000	7'	167	0.9'	0.9'	6'	3.5'	148	1.0'	0.8'	2'	3.5'	256	1.0'	0.5'	4'	4.0'	181	1.0	0.7'	
				10'	82	1.2'	1.2'	9'	5.2'	66	1.5'	1.3'	3'	5.2'	114	1.5'	0.7'	6'	6.0'	81	1.5	1.0'	
				13'	49	1.6'	1.6'	12'	6.9'	37	2.0'	1.7'	4'	6.9'	64	2.0'	1.0'	8'	8.0'	45	2.0	1.4'	
20W MR16 NSP (ESX)	13°	3600	5000	16'	32	2.0'	2.0'	15'	8.7'	24	2.3'	2.1'	5'	8.7'	41	2.5'	1.2'	10'	10.0'	29	2.5	1.7'	
				6'	100	1.4'	1.4'	5'	2.9'	94	1.5'	1.3'	2'	3.5'	113	1.9'	0.9'	3'	3.0	141	1.4'	1.0'	
				8'	56	1.8'	1.8'	7'	4.0'	48	2.1'	1.8'	3'	5.2'	50	2.8'	1.4'	5'	5.0	51	2.3'	1.6'	
20W MR16 FL (BAB)	40°	525	5000	10'	36	2.3'	2.3'	9'	5.2'	29	2.7'	2.4'	4'	6.9'	28	3.8'	1.8'	7'	7.0'	26	3.2'	2.3'	
				4'	33	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	3'	5.2'	7	14.5'	4.4'	4'	4.0'	12	6.7'	4.1'	
				5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	4'	6.9'	4	19.3'	5.8'	5'	5.0'	7	8.4'	5.1'	
35W MR16 NSP (FRB)	12°	8700	4000	2'	131	1.5'	1.5'	2'	1.2'	85	2.0'	1.7'	1'	1.7'	66	4.8'	1.5'	2'	2.0'	46	3.4'	2.1'	
				3'	58	2.2'	2.2'	3'	1.7'	38	3.0'	2.5'	2'	3.5'	16	9.7'	2.9'	3'	3.0'	21	5.0'	3.1'	
				4'	33	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	3'	5.2'	7	14.5'	4.4'	4'	4.0'	12	6.7'	4.1'	
35W MR16 SP (FRA)	20°	3900	4000	5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	4'	6.9'	4	19.3'	5.8'	5'	5.0'	7	8.4'	5.1'	
				7'	178	1.5'	1.5'	6'	3.5'	157	1.7'	1.5'	2'	3.5'	272	1.7'	0.8'	4'	4.0'	192	1.7'	1.2'	
				10'	87	2.1'	2.1'	9'	5.2'	70	2.5'	2.2'	3'	5.2'	121	2.6'	1.3'	6'	6.0'	85	2.6'	1.8'	
35W MR16 FL (FMW)	40°	1600	4000	13'	51	2.7'	2.7'	12'	6.9'	39	3.4'	2.9'	4'	6.9'	68	3.5'	1.7'	8'	8.0'	48	3.4'	2.4'	
				16'	34	3.4'	3.4'	15'	8.7'	25	4.2'	3.6'	5'	8.7'	44	4.3'	2.1'	10'	10.0'	31	4.3'	3.0'	
				6'	108	2.1'	2.1'	5'	2.9	101	2.4'	2.0'	2'	3.5'	122	3.1'	1.4'	3'	3.0'	153	2.2'	1.5'	
37W MR16 IR NSP	10°	11500	4000	8'	61	2.8'	2.8'	7'	4.0'	52	3.3'	2.9'	3'	5.2'	54	4.7'	2.1'	5'	5.0'	55	3.6'	2.5'	
				10'	39	3.5'	3.5'	9'	5.2'	31	4.3'	3.7'	4'	6.9'	30	6.2'	2.8'	7'	7.0'	28	5.1'	3.5'	
				12'	27	4.2'	4.2'	11'	6.4'	21	5.2'	4.5'	5'	8.7'	20	7.8'	3.5'	9'	9.0'	17	6.6'	4.5'	
37W MR16 IR NFL	25°	3500	4000	3'	1.7'	115	3.0'	2.5'	1'	1.7'	200	4.8'	1.5'	3'	3.0'	63	5.0'	3.1'	3'	3.0'	63	5.0'	3.1'
				6'	44	4.4'	4.4'	5'	2.9'	42	5.1'	4.2'	2'	3.5'	50	9.7'	2.9'	4'	4.0'	35	6.7'	4.1'	
				8'	25	5.8'	5.8'	7'	4.0'	21	7.1'	5.8'	3'	5.2'	22	14.5'	4.4'	5'	5.0'	23	8.4'	5.1'	
37W MR16 IR FL	40°	2050	4000	10'	16	7.3'	7.3'	9'	5.2'	13	9.1'	7.6'	4'	6.9'	13	19.3'	5.8'	6'	6.0'	16	10.1'	6.2'	
				6'	180	1.4'	1.4'	7'	4.0'	152	1.6'	1.4'	3'	5.2'	160	2.1'	1.0'	5'	5.0'	163	1.8'	1.2'	
				12'	80	2.1'	2.1'	10'	5.8'	75	2.3'	2.0'	4'	6.9'	90	2.9'	1.4'	7'	7.0	83	2.5'	1.7'	
42W MR16 VNSP (EZY)	9°	13100	3500	16'	45	2.8'	2.8'	13'	7.5'	44	3.0'	2.8'	5'	8.7'	58	3.6'	1.7'	9'	9.0	50	3.2'	2.2'	
				20'	29	3.5'	3.5'	16'	9.2'	29	3.7'	3.2'	6'	10.4'	40	4.3'	2.1'	11'	11.0'	34	3.9'	2.7'	
				6'	97	2.7'	2.7'	5'	2.9'	91	3.0'	2.6'	2'	3.5'	109	4.2'	1.8'	3'	3.0'	137	2.8'	1.9'	
50W MR16 NSP (EXT)	14°	10200	4000	8'	55	3.5'	3.5'	7'	4.0'	46	4.2'	3.6'	3'	5.2'	49	6.2'	2.7'	5'	5.0'	49	4.7'	3.1'	
				10'	35	4.4'	4.4'	9'	5.2'	28	5.4'	4.6'	4'	6.9'	27	8.3'	3.5'	7'	7.0'	25	6.5'	4.4'	
				12'	24	5.3'	5.3'	11'	6.4'	19	6.6'	5.6'	5'	8.7'	18'	10.4'	4.4'	9'	9.0'	15	8.4'	5.6'	
50W MR16 NFL (EXZ)	27°	3400	6000	3'	1.78	2.9'	2.9'	3'	1.7'	148	3.0'	2.5'	1'	1.7'	258	4.8'	1.5'	3'	3.0'	61	5.0'	3.1'	
				6'	57	4.4'	4.4'	5'	2.9'	53	5.1'	4.2'	2'	3.5'	64	9.7'	2.9'	4'	4.0'	45	6.7'	4.1'	
				8'	32	5.8'	5.8'	7'	4.0'	27	7.1'	5.9'	3'	5.2'	28	14.5'	4.4'	5'	5.0'	29	8.4'	5.1'	
50W MR16 FL (EXN)	40°	1850	6000	10'	21	7.3'	7.3'	9'	5.2'	16	9.1'	7.6'	4'	6.9'	16	19.3'	5.8'	6'	6.0'	20	10.1'	6.2'	
				4'	116	2.9'	2.9'	3'	1.7'	134	3.0'	2.5'	1'	1.7'	231	4.8'	1.5'	3'	3.0'	73	5.0'	3.1'	
				6'	51	4.4'	4.4'	5'	2.9	48	5.1'	4.2'	2'	3.5'	58	9.7'	2.9'	4'	4.0'	41	6.7'	4.1'	
50W MR16 WFL (FNV)	55°	1150	4000	8'	29	5.8'	5.8'	7'	4.0'	25	7.1'	5.9'	3'	5.2'	26	14.5'	4.4'	5'	5.0'	26	8.4'	5.1'	
				10'	19	7.3'	7.3'	9'	5.2'	15	9.1'	7.6'	4'	6.9'	14	19.3'	5.8'	6'	6.0'	18	10.1'	6.2'	
				3'	128	3.1'	3.1'	3'	1.7'	83	4.6'	3.6'	1'	1.7'	144	22.3'	2.1'	2'	2.0'	102	5.7'	2.9'	
73W MR16 SP	10°	14000	4000	5'	46	5.2'	5.2'	5'	2.9'	30	7.6'	6.0'	2'	3.5'	36	44.5'	4.2'	3'	3.0'	45	8.6'	4.4'	
				7'	23	7.3'	7.3'	7'	4.0'	15	10.7'	8.4'	3'	5.2'	16	66.8'	6.2'	4'	4.0'	25	11.4'	5.9'	
				9'	14	9.4'	9.4'	9'	5.2'	9	13.7'	10.8'	4'	6.9'	9	89.1'	8.3'	5'	5.0'	16	14.3'	7.4'	
73W MR16 FL	36°	2500	4000	8'	219	1.4'	1.4'	7'	4.0'	186	1.6'	1.4'	3'	5.2'	194	2.1'	1.0'	5'	5.0'	198	1.8'	1.2'	
				12'	97	2.1'	2.1'	10'	5.8'	91	2.3'	2.0'	4'	8.9'	109	2.9'	1.4'	7'	7.0'	101	2.5'	1.7'	
				16'	55	2.8'	2.8'	13'	7.5'	54	3.0'	2.6'	5'	8.7'	70	3.6'	1.7'	9'	9.0'	61	3.2'	2.5'	
				16'	35	3.5'	3.5'	16'	8.2'	36	3.7'	3.2'	6'	10.4'	4.9	4.3'	2.1'	11'	11.0'	41	3.8'	2.7'	
				4'	156	2.5'	2.6'	3'	1.7'	180	2.7'	2.3'	1'	1.7'	313	3.8'	1.3'	3'	3.0'	98	4.4'	2.8'	
				6'	59	3.8'	3.8'	5'	2.9'	65	4.5'	3.8'	2'	3.5'	78	7.5'	2.6'	4'	4.0'	55	5.8'	3.7'	
				8'	39	5.2'	5.2'	7'	4.0'	33	6.3'	5.3'	3'	5.2'	35	11.4'	3.9'	5'	5.0'	35	7.3'	4.6'	
				10'	25	6.5'	6.5'	9'	5.2'	20	6.1'	6.6'	4'	6.9'	20	15.2'	5.2'	6'	6.0'	25	6.7'	5.5'	

Job Information Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2011 Philips Group • G1011