

Ceiling Cutout: 5 1/16" (129 mm) Dia.

Reflector Trim		Frame-In Kit		
C4MRL CLW	Specular Clear, White Flange	Non-IC 120V/277V	Non-IC AirSeal® 120V/277V	IC AirSeal® 120V
C4MRL CLP	Specular Clear, Polished Flange	C4LVMU Magnetic 120/277V C4LVE1 Electronic 120V	C4ALVMU Magnetic 120/277V C4ALVE1 Electronic 120V	C4AICLVM1 Magnetic 120V C4AICLVE1 Electronic 120V
C4MRL <input type="checkbox"/>	Add suffix. See options for other finishes.	C4LVE2 Electronic 277V 42-75W MR16(12V)	42-75W MR16(12V)	20-50W MR16(12V)
Remodel Frame-In Kit				
		Non-IC 120V		
		C4LVE1RM 50W Max. MR16 (12V)		See C4LVE1RM specification sheet for more information.

Note: Magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Features

- Aperture Cone:** 16 ga. aluminum, 50° visual cutoff to lamp and lamp image. Keyed to kick reflector to prevent incorrect installation of cone. Hinged, and snaps onto kick reflector for easy tool-less installation. Available with painted white or polished flange. Interchangeable with other Evolution 4 1/2" low voltage trims.
- Kick Reflector:** 16 ga. aluminum. Specular kick reflector with directional spread lens distributes light smoothly for vertical surface wall washing.
- Directional Spread Lens:** High temperature, tempered glass. Precisely contoured to fit onto cone; replaceable.
- Socket Harness:** Porcelain bi-pin socket. Pre-wired with No. 18 teflon® leads .
- Power Harness:** Provides power to transformer.
- Frame-In Kit:** Compatible frame-in kits are listed above. See separate frame-in kit specification sheets for details.
Non-IC and Non-IC AirSeal® - Insulation must be kept 3" away from fixture sides and wiring compartments and must not be placed above fixture in a manner which will entrap heat.
IC-Airseal® - Fixture may be in direct contact with insulation.
- Maximum Ceiling Thickness:** .875", 1.75" with C4TCA2 accessory (see C4TCA2 specification sheet for details.)

Options and Accessories

Reflector Finishes¹

Clear: CL Gold: GD White: WH Black: BK
Comfort Clear Diffuse: CCD Champagne Bronze: CCZ

¹Specify desired flange

W White, **P** Polished


Labels

CULUS Listed (suitable for wet locations), I.B.E.W.

Teflon® is a registered trademark of E.I. DuPont.


Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lighting Data

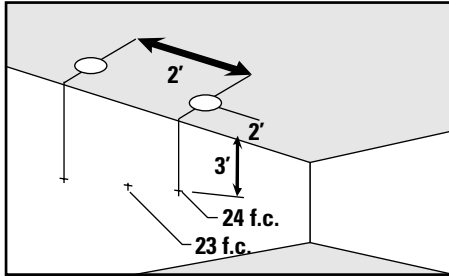

EXAMPLE: With multiple units located 2' from wall and 2' on center, the illumination on the wall 3' down from the ceiling is 24 f.c. beneath and 23 f.c. between fixtures.

Candlepower Curve
73W MR16 RL

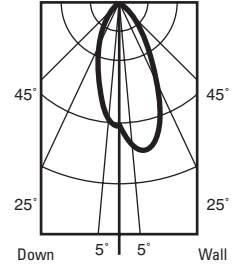

Report 0825FR
Efficiency = 47.8%

Footcandles on Wall From Multiple Units - 73W MR16 FL

Units 2 Feet From Wall

	← 2' →		← 3' →			
Distance From Ceiling, Ft.						
1'	10	8	10	9	3	9
2'	21	18	21	16	11	16
3'	24	23	24	18	13	18
4'	23	22	23	16	14	17
5'	19	19	19	14	12	14
6'	15	15	15	11	10	11
7'	12	12	12	9	8	9
8'	10	10	10	7	7	7
9'	8	8	8	6	6	6

Units 3 Feet From Wall

	← 2' →		← 3' →			
Distance From Ceiling, Ft.						
1'	2	2	2	2	1	2
2'	7	6	7	6	4	6
3'	9	8	9	8	6	8
4'	11	10	11	9	7	9
5'	11	10	11	9	7	9
6'	10	10	10	8	7	8
7'	9	9	9	7	7	7
8'	8	8	8	7	6	7
9'	7	7	7	6	6	6

Job Information **Type:**