


Brisa™ Linear Bow Surface Mount **FB9314UDA**

Page 1 of 1

Wall/Ceiling Mounted T5 Fluorescent ADA Compliant

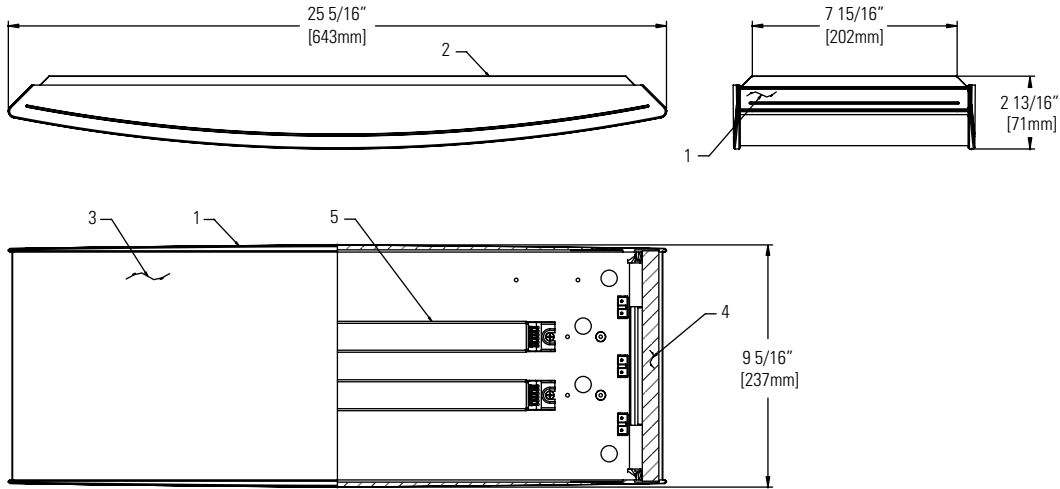

Fixture Ordering Information

Catalog No.	Description	Finish	Wattage	Volts	Lamp
FB9314UDA	Linear Bow Surface Mount Dali Dimming	Satin aluminum	14W	120-277V	(3) T5

Diffuser Ordering Information

Catalog No.	Description	Finish	Dimensions (Nominal)
FBA9	Acrylic Bow Diffuser	Opal	9" X 24"
FBG9	Glass Bow Diffuser	Opal	9" X 24"

Features

- Housing Sides and ends:** Die-cast aluminum.
- Back Pan:** Stamped 18ga. (0.048") sheet metal.
- Diffuser:** Bowed opal glass or opal acrylic
- Optics:** Internal white acrylic diffuser covers slots on housing sides and ends.

Mounting

Fixture Mounts directly to 4" octagonal junction box.

Electrical

- Ballast-Fixture:** Has (1) 1-lamp ballast and (1) 2-lamp ballast, allowing for separate switching.

A. Dali Dimming 120V-277V	1 Lamp		2 Lamp	
Voltage	120V	277V	120V	277V
Total Input Watts	18W	18W	35W	35W
Max. Line Current (Amps)	0.15A	0.07A	0.28A	0.13A
Power Factor	>0.98	>0.98	>0.98	>0.98
THD	<10%	<10%	<10%	<10%
Min. Starting Temp	50°F,	-10°C	50°F,	-10°C
Dimming Range	100%-1%		100%-1%	

- Luminaire-Ballast Disconnect:** Meets NEC 410.130(G) and CEC Disconnect Requirements.

Lampholders

Fluorescent: Mini Bi-Pin, G5 Base

Lamping (by others)

General Electric	Osram/Sylvania	Philips
(1) 14W T5 Linear Fluorescent		
F14W/T5/*/ECO	FP14/*	F14T5/*/ALTO
*Manufactures Color Temperature Designation		

Finish

Satin Aluminum

Labels

cULus Listed. Suitable for Damp Locations.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2007 Genlyte Group LLC • 0907

LIGHTOLIER®