

**Ordering Information**

Catalog No.	Description	Mounting
LLA01RF	Flood Reflector	For use with Alcyon LED Small Cylinder LLA01.
LLA01RFSOL	Flood Reflector with Solite Lens	Ordered Separately.

**Features**

- 1. **Flood Reflector:** Aluminum, faceted, specular, anodized and sealed.

**Finish**

Specular Anodized and Sealed.

**Labels**

c.UL


Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

**Aiming Angle:**

**L** Beam length                      **D** Distance  
**W** Beam Width                      **A** Aiming Angle  
**C** Distance to center beam       **FC** Footcandles

**L** and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.  
 CBCP = Center Beam Candle Power.

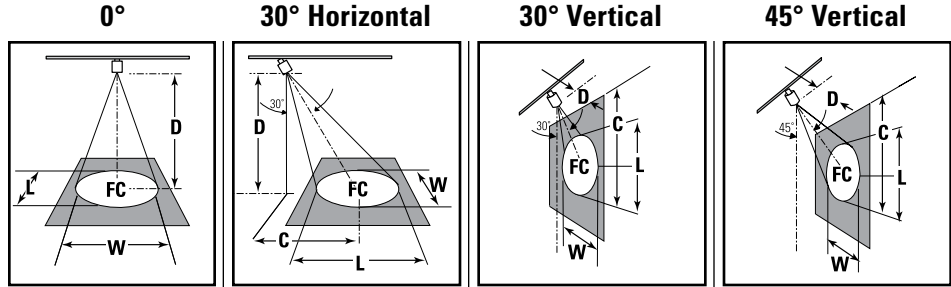

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0°				30° Horizontal				30° Vertical				45° Vertical						
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
LLA01 w/Solite Lens		1,275	50,000	5	51	3.6	3.6	5	2.9	30	4.3	3.6	1.5	2.6	71	7.2	2.2	2	2.0	113	3.4	2.1
				6	35	4.4	4.4	6	3.5	21	5.2	4.4	2	3.5	40	9.7	2.9	3	3.0	50	5.0	3.1
				7	26	5.1	5.1	7	4.0	15	6.1	5.1	3	5.2	18	14.5	4.4	4	4.0	28	6.7	4.1
				8	20	5.8	5.8	8	4.6	12	7.0	5.8	4	6.9	10	19.3	5.8	6	6.0	13	10.1	6.2
LLA01 w/Clear Lens		1,421	50,000	5'	57	3.4'	3.4'	5'	2.9'	37	4.8'	4.0'	2'	2.6'	79	6.4'	2.1'	2'	2.0'	126	3.1'	1.9'
				6'	39	4.1'	4.1'	6'	3.5'	26	5.7'	4.8'	2'	3.5'	44	8.6'	2.8'	3'	3.0'	56	4.7'	2.9'
				7'	29	4.8'	4.8'	7'	4.0'	19	6.7'	5.6'	3'	5.2'	20	12.8'	4.1'	4'	4.0'	31	6.3'	3.9'
				8'	22	5.5'	5.5'	8'	4.6'	14	7.6'	6.4'	4'	6.9'	11	17.1'	5.5'	6'	6.0'	14	9.4'	5.8'

**Job Information** **Type:**