


Detail of Attaching Fixture to Sloped Ceiling Adapter

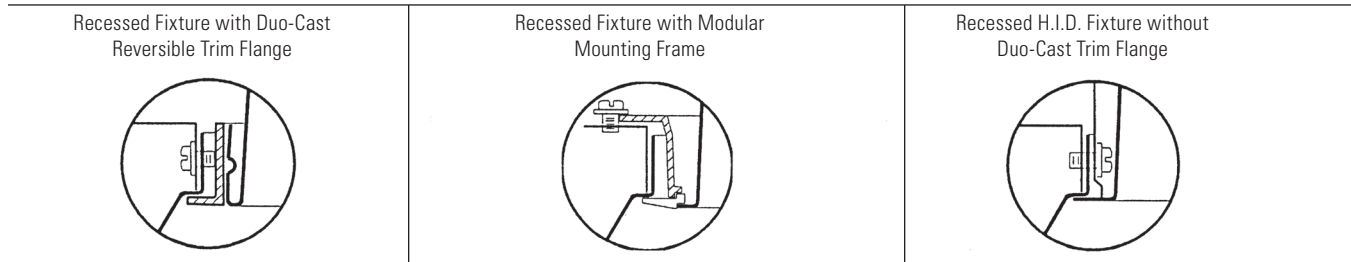

1. Identify Trim Aperture: Complete fixture consists of slope adapter, trim kit, frame-in-kit and SCAHID kit (if needed) , order each separately.

Catalog Number	Aperture	Line Voltage	CFL	HID	LED
7920	4"	A7053, A7701, 7082, 7782, G7057, A7058MG	8011	C439P20, C420T4, C439T4, C470T4 series frames and compatible trims.	C4L05, C4L10
7925	6"	B7054, B7705, B7780, 7084, 7784, E7059, B7760	8021, 8031, 8051, 8052, 8091	C6P39, C6P70, C6P10, C670, C610, C639T6, C670T6, C615T6 series frames and compatible trims.	C6L15
7926	7"	C7055, C7709, 7790QD, 7794QD	8037, 8022, 8056, 8096, 8097	C770, C710, C715 series frames and compatible trims.	C7L1520
7927	8"		8023, 8038, 8039, 8068		

Note: HID and 4"LED applications require SCAHID Kit (sold separately) SCA NOT compatible with enclosed frame-in-kits.

2. Specify desired degree of slope ex. 7920MD 4" aperture with 10° Slope

MC 5°	MD 10°	ME 15°	MF 20°	MG 25°	MH 30°
--------------	---------------	---------------	---------------	---------------	---------------

Features

- Slope Ceiling Adapter:** 16 ga. spun aluminum, matte white finish. Installs with standard recessed fixture in sloped ceilings without changing the vertical axis of the fixture or its lighting characteristics. *The slope ceiling adapter is available the following slope angles: 5°, 10°, 15°, 20°, 25°, 30° (maximum). When ordering, specify Catalog number and Adapter. Example: Adapter suffix for **7920** series in 20° slope ceiling is **7920MF**
- Perforated Tabs (4):** Provide temporary support for the slope ceiling adapter during installation.
- Locking Screws (4):** Secure slope ceiling adapter to mounting frame of fixture.
- Representative Fixture: (shown)** Fixture must be supported by ceiling structure — not Slope Ceiling Adapter.

Alzak® is a registered trademark of ALCOA.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	