


The FBP Series quickly converts standard fluorescent luminaires into emergency luminaires.

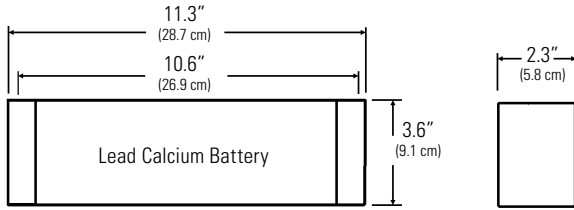

Complete Fixture consists of ballast unit. Select options and accessories below.

Model #	Max. Lumens	Lamp Operation
FBPPL	825	One

Features

- Lamp Operation:** Operates the following lamp types: T4 Compact fluorescent (2 pin with integral starter). See Lamp Operation and performance table for specific lamp performance and operation.
- Illumination:** Provides 90 minutes of emergency illumination, and produces a maximum of 825 lumens initial emergency light output.
- Housing:** Constructed of 20 gauge galvanized steel. Housing allows for housing frame mounting on most recessed luminaires.
- Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with AC indicator lamp and test switch.
- Battery:** Maintenance free, sealed lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 20°F (7°C) to 95°F (35°C).
- Input Power Requirements:** 3.5 watts max.
- Warranty: Electronics:** 2 years; Battery: 2 years.

Code Compliance

UL 924 listed.

Options

ST = Special Input Transformer for 220 VAC/50 Hz, 240 VAC/50Hz. Contact factory for other input voltages and frequencies.

Accessories

CCAPS = Wire bundle cover for mounting external to luminaire

Lamp Operation and Performance

Lamp Type	Watt.	Non-Emerg. Base Type	Emerg. Op. Max. Lumen Output	Max. Lumen Output	Emer Lamp Operation
F5BXT4	5	G23/2 Pin	250	250	One Only
F7BXT4	7	G23/2 Pin	400	400	One Only
F9BXT4	9	G23/2 Pin	600	600	One Only
F13BXT4	13	GX23/2 Pin	825	825	One Only

Notes:

- Maximum non-emergency lumen output can vary based on lamp manufacturer, ambient operating temperature, and ballast manufacturer.
- Maximum emergency lumen output is based on total output of one or two lamps, and can vary based on lamp manufacturer and ambient operating temperature.
- Maximum emergency lumen output is supported for a full 90 minutes of operation.
- Consult factory for compatibility, operation and performance of lamp types not listed.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • B0308