


Lytecaster® Recessed Downlighting **1000LVR**

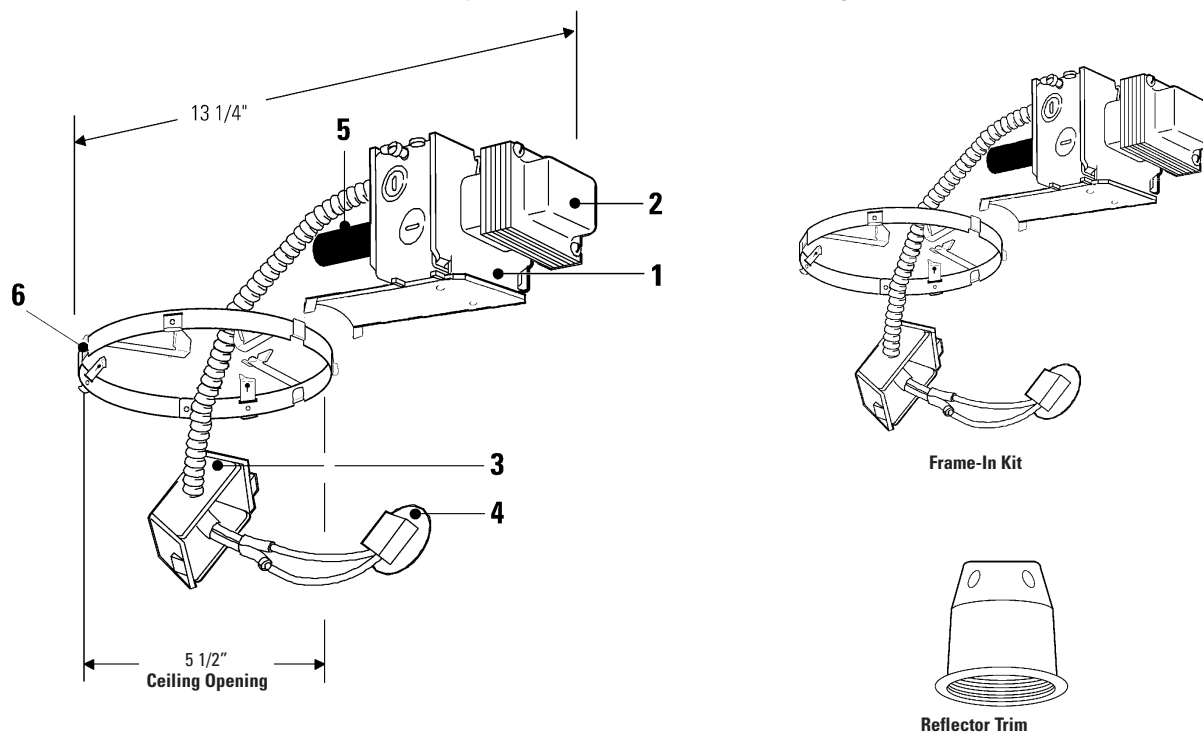

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Frame-In Kit	Reflector Trims — See Individual Reflector Trim Specification Sheets			
	Adjustable			
	Baffles	Cone	Pinhole	Elbow
1000LVR	1055LV 1055WHLV	1056LV 1063LV 1064LV 1064CDLV	1052LV	1062LV

Features

- Junction Box:** 4" x 3 1/2" x 2"; .063" (#14 ga.) galvanized steel. UL listed for 90° C supply wire. Integral cable clamps permit attachment of nonmetallic Romex® or armored cable without need of additional connectors.
- Transformer:** Outboard mounted, magnetic, 120V. primary, nominal 12V. secondary. Removable from below.
- Socket Housing:** .036" (#20 ga.) galvanized steel.
- Socket:** Field replaceable. Two pin socket, pre-wired with #18 SF1 leads to junction box.
- Thermal Protector:** Meets NEC and UL requirements. Insulation must be kept 3" away from fixture sides and wiring compartments and must not be placed above fixture in a manner which will entrap heat.
- Mounting Ring:** .048 (#18 ga.) galvanized steel. Accommodates existing ceilings up to 2" thick. Attaches securely to any type of ceiling material without tools using (3) mounting straps provided. Push-in/twist out clips hold reflector flush to ceiling. Includes adhesive backed aperture template.

Dimming

Dimming Controls: Use only dimmers specifically designed for use with transformers, like Lightolier Onset®, Sunrise® series LV or VA dimmers, or any Lightolier Controls dimming system. Low voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Options & Accessories

- MR16 Socket Replacement:** 1975A
277V Remote Step Down Transformer: 7997 - 277V down to 120V
 300W max. load.

Labels

UL (Suitable for Damp Locations), I.B.E.W.

Romex® is a registered Trademark of General Cable Industries Inc.
US Patent No.'s: 5,957,572 and other US and Foreign Patents Pending.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	