



Decorative Trio® Direct/Indirect Light **40616**

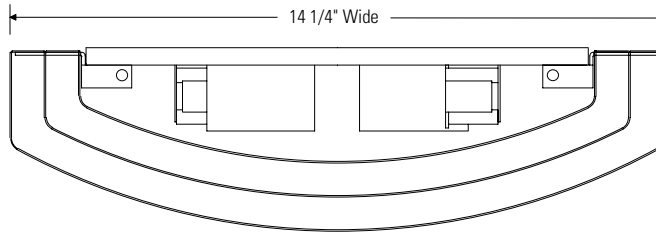

Top View

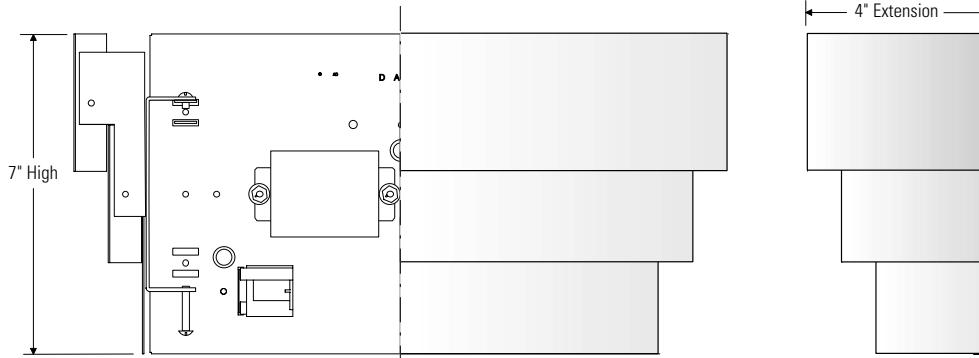

Front View

Side View

Finish	Catalog No.	Voltage	Lamps	Width	Height	Extension
White	40616WHN1	120V NPF	2 Lt. - 13W	12"	7"	5 3/4"
	40616WHH1	120V HPF				
	40616WHN2	277V NPF				
Satin Brass	40616SBN1	120V NPF				
	40616SBH1	120V HPF				
	40616SBH2	277V NPF				
Satin Chrome	40616SCN1	120V NPF				
	40616SCH1	120V HPF				
	40616SCH2	277V NPF				

Features

- Housing:** All painted finishes are baked enamel.
- Backplate:** Open at top and bottom to provide uplight and downlight.



Electrical

No. 18 ga. AWM leads. Fixtures are rated for connection to 60°C building wiring; they can be used for either existing or new construction.

Labels

UL (Suitable for damp locations), I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

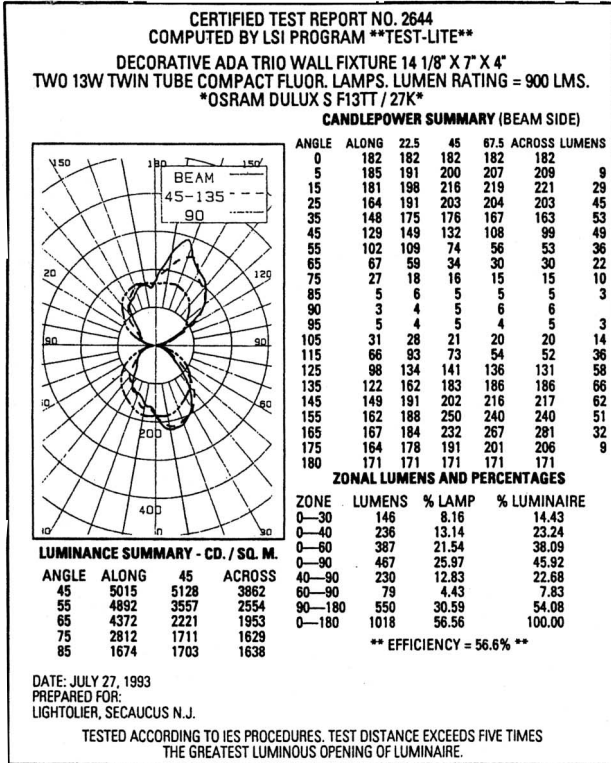

CORRIDOR LIGHTING
Footcandles on Floor

10'	0.8	0.8	0.7	0.7	0.6	0.5	0.5
9'	1.0	1.0	0.9	0.8	0.7	0.6	0.5
8'	1.2	1.2	1.1	1.0	0.9	0.7	0.6
7'	1.6	1.6	1.5	1.3	1.1	0.9	0.7
6'	2.1	2.0	1.9	1.6	1.3	1.0	0.8
5'	2.7	2.6	2.4	2.0	1.6	1.2	1.0
4'	3.4	3.3	3.0	2.4	1.9	1.4	1.1
3'	4.3	4.2	3.6	2.9	2.2	1.6	1.2
2'	5.2	5.0	4.3	3.3	2.5	1.8	1.3
1'	5.9	5.7	4.8	3.7	2.7	1.9	1.4
0'	6.2	5.9	5.0	3.8	2.7	2.0	1.4

← Luminaire

Footcandles values are initial.
 Luminaire mounted 6'6" above floor.
 Corridor is 8' wide by 8' high.
 Room Reflectances: 80% Ceiling, 50% Walls, 20% Floor.
 For multiple luminaires add together footcandles contributed by each luminaire at point(s) desired.

LIGHTOLIER

Job Information **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902